


TECHNICAL DATA SHEET

ND 4+1 Drainage System



ND 4+1 Drainage System

High-performance CE-marked drainage system with an innovative dimple design made out of recycled High Impact Polystyrene. The core of the ND Drainage System is a perforated, vapour-permeable dimpled sheet with a high compressive strength, a construction height of approx. 13.5 mm and a water reservoir of approx. 3.6 l/m².


A non-woven geotextile is glued to the back of the dimpled sheet as a filter layer and a vapour-permeable geotextile is bonded to each dimple as a protection and separation layer. The geotextiles are glued and not thermally bonded to the dimpled core to avoid damage to the mechanical and hydraulic properties of the geotextile and the drainage system. It also prevents the geotextile to be pushed in between the dimples obstructing the drainage capacity.

Application

The ND 4+1 Drainage System is a component of the Nophadrain Extensive Green Roof System and the Nophadrain Intensive Green Roof System that acts as a filter, drainage and protection layer. The ND 4+1 Drainage System is suitable for warm roof and inverted roof constructions.

Properties

- Material dimpled sheet: high impact polystyrene (HIPS)
- Material geotextile filter: polypropylene (PP)
- Material vapour-permeable geotextile: polypropylene (PP) and polyethylene (PE)
- Construction height: approx. 13.5 mm
- Compressive strength: approx. 700 kPa
- Perforations/m²: approx. 1,540 / ø 6.3 mm
- Water reservoir: approx. 3.6 l/m²
- Weight: approx. 1,010 g/m²
- Drainage capacity i = 1 at 20 kPa: approx. 5.60 l/(s.m)
- Drainage capacity fall ratio 2 % at 20 kPa: approx. 0.68 l/(s.m)

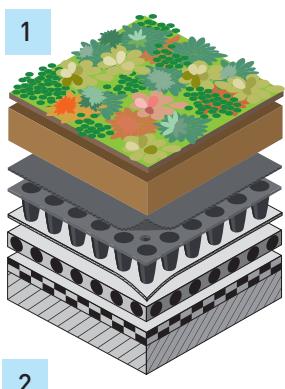

Composition Nophadrain Extensive (1)
and Intensive (2) Green Roof System

Product	Dimensions (L x W)	Packaging
ND 4+1 Drainage System	approx. 32 x 1.25 m	approx. 40 m ² , roll

nophadrain®
SMART GREEN ROOF SYSTEMS

Nophadrain BV
Mercuriusstraat 10
6468 ER Kerkrade
The Netherlands

+31 (0)45 535 50 30
info@nophadrain.com

www.nophadrain.com

Data sheet

	DoP4+1-005		ND 4+1	
Material Properties	Standard	Unit	Performance	
Core	-	-	HIPS	
Filter geotextile	-	-	PP	
Separation film	-	-	-	
Separation geotextile	-	-	PP/PE	
Mechanical Properties (mean values)				
Compressive strength	hEN ISO 25619-2	kPa	700	
Compressive strength at 10 % deformation	hEN ISO 25619-2	kPa	650	
Deformation at 1 mPa	hEN ISO 25619-2	%	-	
Tensile strength ¹ (MD/CMD) ²	hEN ISO 10319	kN/m	9/10	
CBR puncture resistance ¹	hEN ISO 12236	kN	1.6	
Dynamic performance (cone drop)	hEN ISO 13433	mm	28	
Resistance to weathering ³	hEN ISO 12224	%	60/80	
Physical Properties				
Construction height at 2 kPa	-	mm	13.5	
Dimple height at 2 kPa	-	mm	12	
Perforations per m ²	-	-	1,540	
Diameter perforations	-	mm	6.3	
Water reservoir	-	l/m ²	3.6	
Material dimensions (L x W)	-	m	32 x 1.25	
Mass per unit area	-	g	1,010	
Surface area per roll	-	m ²	40	
Roll diameter	-	cm	75	
Roll weight	-	kg	40	
Hydraulic Properties (mean values)				
Opening size O ₉₀ ¹	hEN ISO 12956	µm	100	
Water permeability H ₅₀ ¹	hEN ISO 11058	mm/s	95	
Drainage Capacity (mean values)				
Vertical drainage / Wall - gradient i=1				
Surface load		Build-in-depth		
20 kPa	2.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.60
30 kPa	3.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.54
50 kPa	5.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.48
100 kPa	10.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.25
200 kPa	Exceptional	hEN ISO 12958 ⁴	l/(s.m)	5.03
Horizontal drainage / Roof				
Fall = 0 % - Exceptional case				
≤ 2 kPa - extensive green roof	FH Karlsruhe (D) ⁵	l/(s.m)	-	
≤ 10 kPa - intensive green roof	FH Karlsruhe (D) ⁵	l/(s.m)	-	
Fall = 1 % - Exceptional case				
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.46	
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.45	
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.43	
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.39	
Fall = 1.5 %				
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.60	
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.58	
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.54	
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.51	
Fall = 2 %				
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.68	
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.68	
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.61	
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.56	
Fall = 2.5 %				
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.72	
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.72	
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.70	
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.63	
Fall = 3 %				
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.84	
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.84	
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.75	
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.70	

¹ Performance expressed of the filter/geotextile only

² MD = Machine direction / CMD = Cross Machine Direction

³ Material has to be completely covered within 14 days after installation

⁴ hEN ISO 12958 tested hard/soft

⁵ FH Karlsruhe (D) tested hard/hard

The values correspond to average results obtained in our laboratories and outside institutes and are indicative. The right is reserved to make changes at any time without notice. Standard variations in mechanical properties of 15 % and in hydraulic properties of 20 % and in physical properties of 5 % are normal.

Nophadrain BV excludes any liability for errors, omissions or otherwise arising from the contents of this document. The reader must satisfy himself or herself as to the principles and practices described in this document in relation to any particular application and take appropriate, independent, professional advice.

V03.2018