



TECHNICAL DATA SHEET

ND 600sv Drainage System

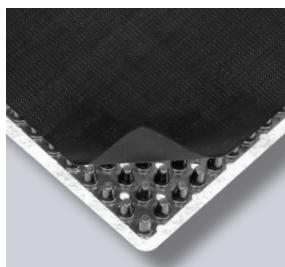

ND 600sv Drainage System

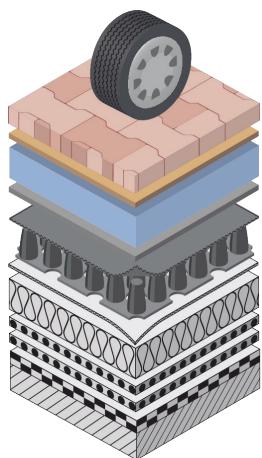

Composition Nophadrain Parking Deck System - cars inverted roof construction

High-performance CE-marked drainage system with an innovative dimple design made out of recycled high impact polystyrene. The core of the ND Drainage System is a perforated, vapour-permeable dimpled sheet with a very high compressive strength, an excellent creep resistance guaranteeing a consistent long term drainage capacity and a construction height of approx. 13 mm. A special mono-filament woven geotextile is bonded to each dimple as a filter layer.

A vapour-permeable geotextile is glued to the back of the dimpled sheet as a separation and protection layer of the XPS insulation panels. The geotextiles are glued and not thermally bonded to the dimpled core to avoid damage to the mechanical and hydraulic properties of the geotextile and the drainage system. It also prevents the geotextile to be pushed in between the dimples obstructing the drainage capacity.

Application

The ND 600sv Drainage System is a component of the Nophadrain Parking Deck System – cars that acts as a filter, drainage and protection layer on an inverted roof construction.

Technical specifications

- Material dimpled sheet: recycled high impact polystyrene (HIPS)
- Material woven geotextile filter: polypropylene (PP)
- Material vapour-permeable geotextile: polypropylene (PP) and polyethylene (PE)
- Construction height: approx. 13 mm
- Compressive strength: approx. 900 kPa
- Perforations/m²: approx. 1,540 / ø 6.3 mm
- Weight: approx. 1,315 g/m²
- Drainage capacity at i = 1 at 20 kPa: approx. 5.27 l/(s.m)
- Drainage capacity at fall ratio 2 % at 20 kPa: approx. 0.72 l/(s.m)
- Test: performance test at the Technical University Munich (D) - assessment of the performance and behaviour of a pavement structure under simulated traffic conditions.

Product	Dimensions (L x W)	Packaging
ND 600sv Drainage System	approx. 32 x 1.25 m	approx. 40 m ² , roll

nophadrain®
SMART GREEN ROOF SYSTEMS

Nophadrain BV
Mercuriusstraat 10
6468 ER Kerkrade
Netherlands

+31(0)45 535 50 30
info@nophadrain.com

www.nophadrain.com

Data sheet

	DoP600sv-006		ND 600sv			
Material Properties	Standard	Unit	Performance			
Core	-	-	HIPS			
Filter geotextile	-	-	PP-woven			
Separation film	-	-	-			
Separation geotextile	-	-	PP/PE			
Mechanical Properties (mean values)						
Compressive strength	hEN ISO 25619-2	kPa	900			
Compressive strength at 10 % deformation	hEN ISO 25619-2	kPa	800			
Deformation at 1 mPa	hEN ISO 25619-2	%	-			
Tensile strength ¹ (MD/CMD) ²	hEN ISO 10319	kN/m	44/52			
CBR puncture resistance ¹	hEN ISO 12236	kN	4			
Dynamic performance (cone drop)	hEN ISO 13433	mm	9			
Resistance to weathering ³	hEN ISO 12224	%	60/80			
Physical Properties						
Construction height at 2 kPa	-	mm	13			
Dimple height at 2 kPa	-	mm	12			
Perforations per m ²	-	-	1,540			
Diameter perforations	-	mm	6.3			
Water reservoir	-	l/m ²	-			
Material dimensions (L x W)	-	m	32 x 1.25			
Mass per unit area	-	g	1,315			
Surface area per roll	-	m ²	40			
Roll diameter	-	cm	75			
Roll weight	-	kg	53			
Hydraulic Properties (mean values)						
Opening size O ₉₀ ¹	hEN ISO 12956	µm	187			
Water permeability H ₅₀ ¹	hEN ISO 11058	mm/s	44			
Drainage Capacity (mean values)						
Vertical drainage / Wall - gradient i=1						
Surface load		Build-in-depth				
20 kPa	2.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.27		
30 kPa	3.0 m	hEN ISO 12958 ⁴	l/(s.m)	5.19		
50 kPa	5.0 m	hEN ISO 12958 ⁴	l/(s.m)	4.97		
100 kPa	10.0 m	hEN ISO 12958 ⁴	l/(s.m)	4.51		
200 kPa	Exceptional	hEN ISO 12958 ⁴	l/(s.m)	3.74		
Horizontal drainage / Roof						
Fall = 0 % - Exceptional case						
≤ 2 kPa - extensive green roof	FH Karlsruhe (D) ⁵	l/(s.m)	-			
≤ 10 kPa - intensive green roof	FH Karlsruhe (D) ⁵	l/(s.m)	-			
Fall = 1 % - Exceptional case						
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.54			
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.49			
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.36			
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.28			
Fall = 1.5 %						
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.71			
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.63			
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.48			
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.38			
Fall = 2 %						
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.80			
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.72			
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.52			
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.44			
Fall = 2.5 %						
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.85			
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.82			
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.56			
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.48			
Fall = 3 %						
≤ 10 kPa - extensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.95			
≤ 20 kPa - intensive green roof	hEN ISO 12958 ⁴	l/(s.m)	0.91			
100 kPa - podium roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.62			
200 kPa - parking roof deck	hEN ISO 12958 ⁴	l/(s.m)	0.51			

¹ Performance expressed of the filter/geotextile only

² MD = Machine direction / CMD = Cross Machine Direction

³ Material has to be completely covered within 14 days after installation

⁴ hEN ISO 12958 tested hard/soft

⁵ FH Karlsruhe (D) tested hard/hard

The values correspond to average results obtained in our laboratories and outside institutes and are indicative. The right is reserved to make changes at any time without notice. Standard variations in mechanical properties of 15 % and in hydraulic properties of 20 % and in physical properties of 5 % are normal.

Nophadrain BV excludes any liability for errors, omissions or otherwise arising from the contents of this document. The reader must satisfy himself or herself as to the principles and practices described in this document in relation to any particular application and take appropriate, independent, professional advice.

V09.2019